

Exceeding The Limits To Always Get The Best





800x1600 MM

CONNECTING THE VALUE OF SLAB






CONTINUA+ is the most efficient, highest-productivity technology for the accurately managed manufacture of ceramic slabs and tiles, also producible with traditional bodies. The slabs are, in fact, formed without using a traditional press or mould, ensuring maximum flexibility in terms of size and thickness.




CONTINUA+ seamlessly integrates the powder forming phase and subsequent digital decoration. The key strengths of this exclusive process are high quality texturing and unrivalled surface shine.



PRODUCTFormats

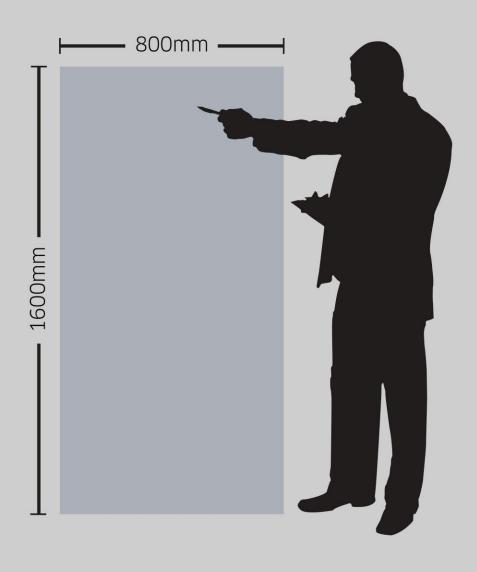

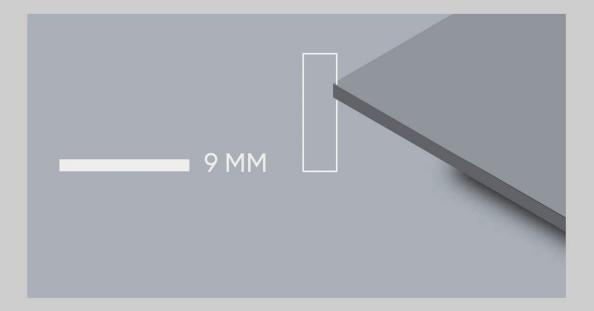

The thicknesses are one of the most important elements characterizing.

9 mm is set aside for the most demanding product applications such as wall & floor.



PRODUCT Range



Berlinstone Beige



Brazillian Blue



Cansas Wenge



Emerald Gris



Eminent Wood Rare



Ferro Tortora



Harbour Grey



Legno Cherry



Marazzi Choco



Natural Wood Light



Berlinstone Bianco



Cambridge Oak Wood



Emerald Grey



Emerald Taupe



Ferro Cemento



Harbour Beige



Harbour Silver



Legno Wenge



Marazzi Grigio



Poplar Brown



berlinstone-crema



Cansas Grey



Emerald Beige



Eminent Wood Brown



erro Fumo



Harbour Brown



Iron Blue



Marazzi Cemento



Marazzi Oro



Poplar Crema

PRODUCT Finishes

MATT

A matte finish with a light layer of enamel for subtle shine and a pleasantly soft touch. Surface finish which is easy to clean.





APPLICATION Areas



LIGHTWEIGHT



WATERPROOF



RESISTANT TO SCRATCHES

TECHNICAL Features



RESISTANT TO HIGH TEMPERATURES



EASY TO CLEAN



RESISTANT TO BENDING



100% NATURAL



RECYCLABLE



HYGIENIC



RESISTANT TO UV RAYS

AIRPORT

INDUSTRIES

GYMNASIUMS

CORRIDORS HALLS

HOTELS

























OFFICE

SCHOOLS

SUPER MARKET










BERLINSTONE BEIGE

Random Face 2

FINISH **MATT**

SIZE **800**x **1600 MM**



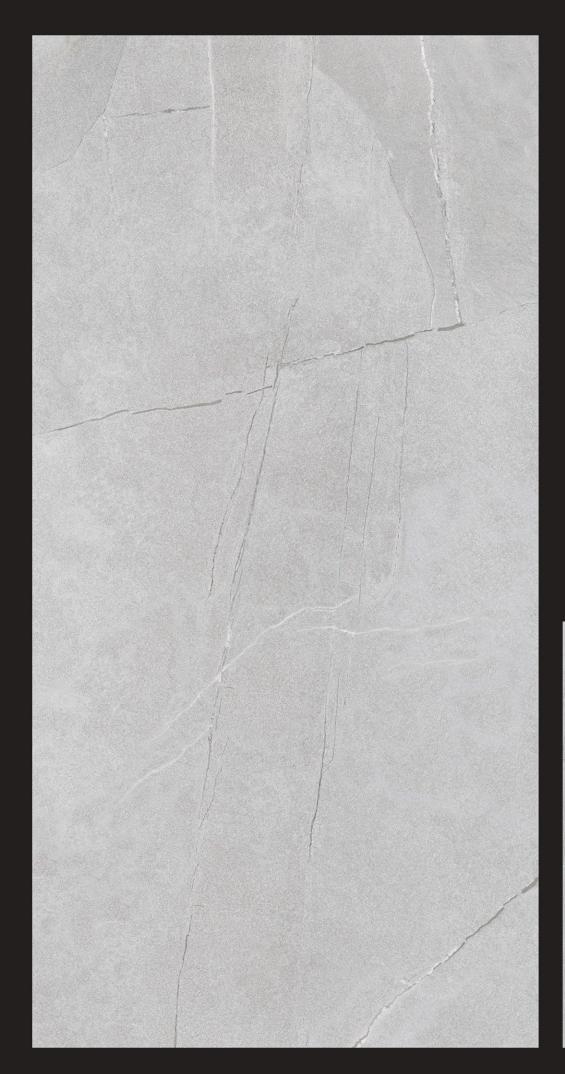




BERLINSTONE BIANCO

Random Face 2

FINISH MATT

SIZE **800**x **1600 MM**



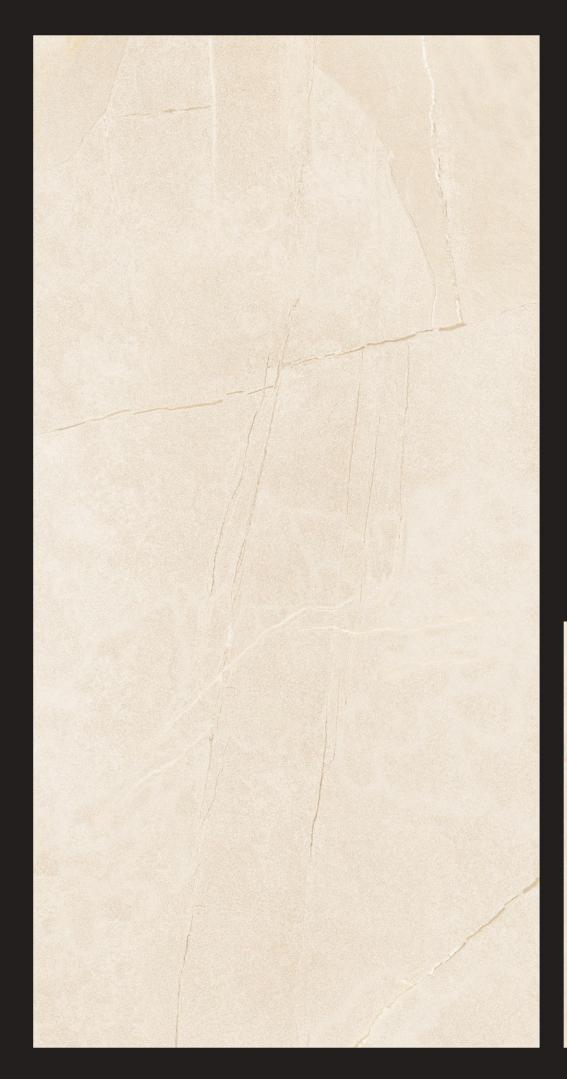




BERLINSTONE CREMA

Random Face 2

FINISH MATT

SIZE **800**x **1600 MM**



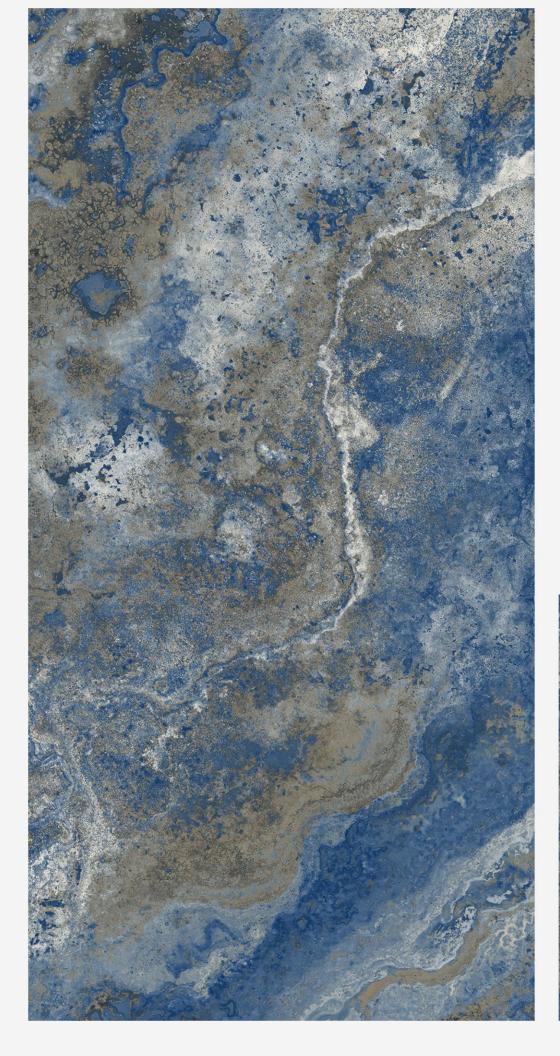



BRAZILLIAN BLUE

Random Face 2

FINISH MATT

SIZE **800**x **1600 MM**





CAMBRIDGE OAK WOOD

Random Face 3

FINISH MATT

SIZE **800**x **1600 MM**











CANSAS GREY Random Face 2

FINISH MATT

SIZE **800**x **1600 MM**







CANSAS WENGE

Random Face 2

FINISH MATT

SIZE **800**x **1600 MM**









Random Face 3

FINISH MATT

SIZE **800**x **1600 MM**



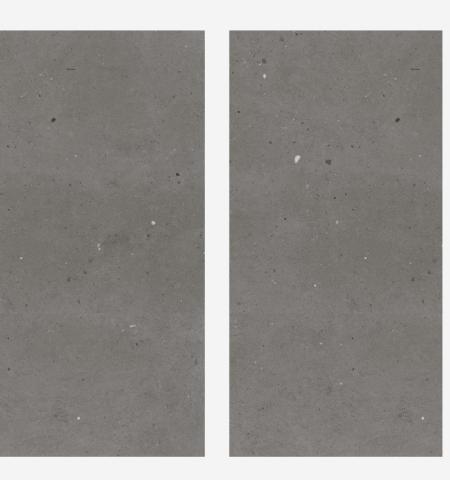

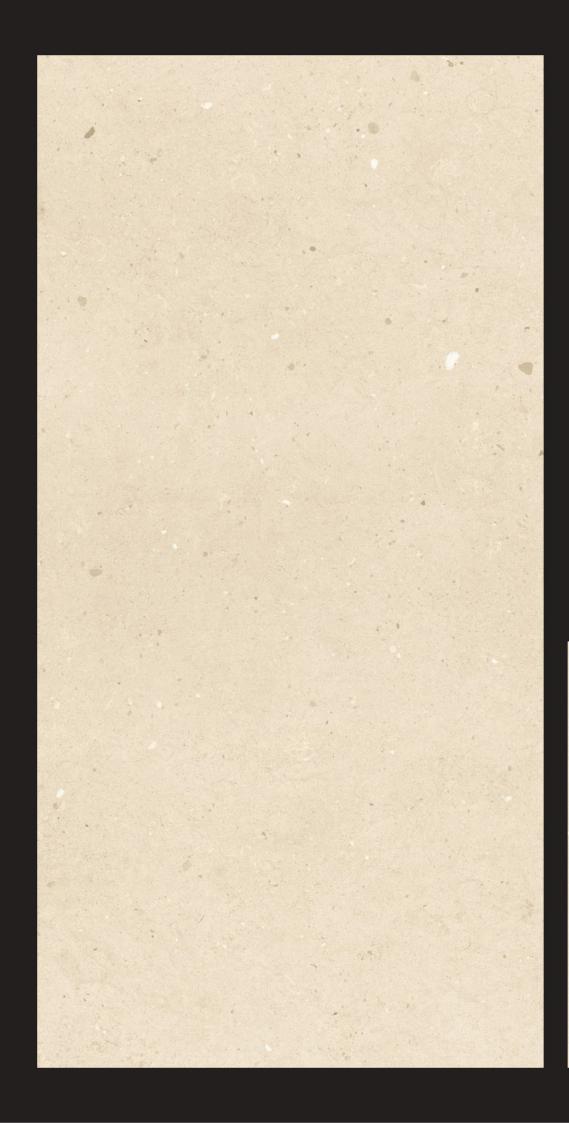


EMERALD BEIGE

Random Face 3

FINISH **MATT**

SIZE **800**x **1600 MM**



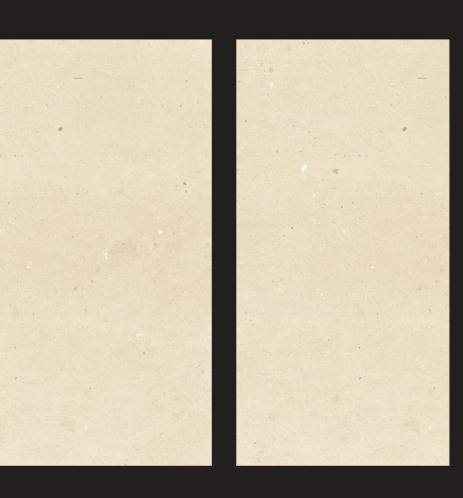





Random Face 3

FINISH MATT

SIZE **800**x **1600 MM**










FINISH MATT

SIZE **800**x **1600 MM**



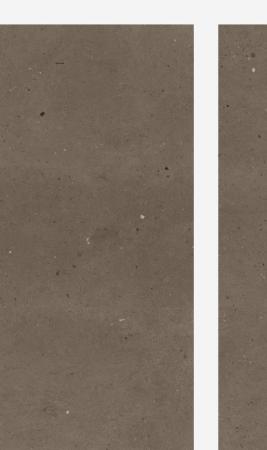







EMINENT WOOD BROWN

Random Face 2

FINISH MATT

SIZE **800**x **1600 MM**








EMINENT WOOD RARE

Random Face 2

FINISH MATT

SIZE **800**x **1600 MM**



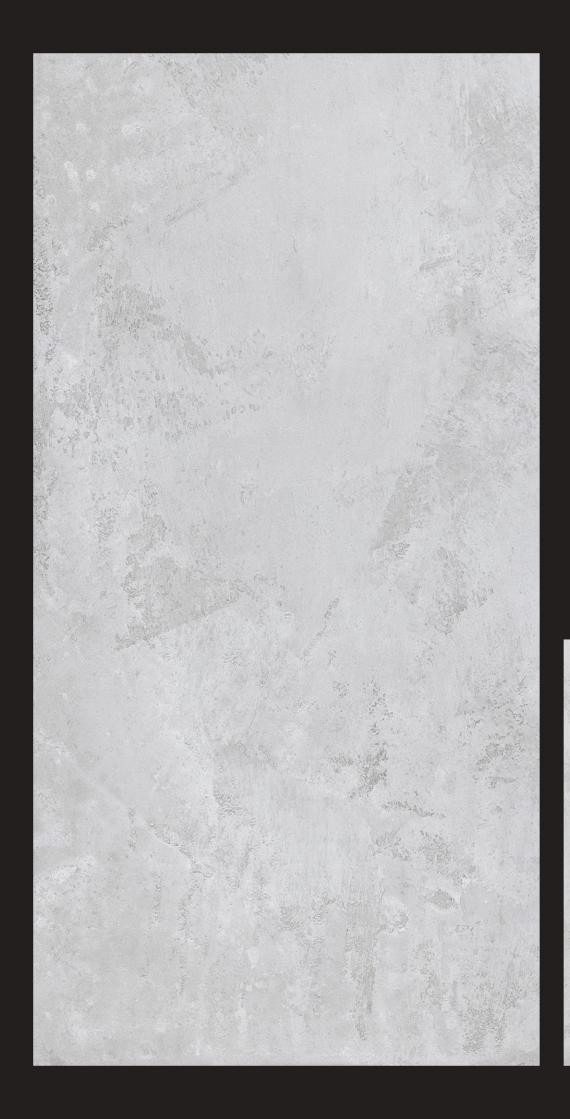



Random Face 3

FINISH MATT

SIZE **800**x **1600 MM**













FINISH MATT

SIZE **800**x **1600 MM**







Random Face 3

FINISH MATT

SIZE **800**x **1600 MM**













HARBOUR BEIGE

Random Face 4

FINISH MATT

SIZE **800**x **1600 MM**











HARBOUR BROWN

Random Face 4

FINISH MATT

SIZE **800**x **1600 MM**











HARBOUR GREY

Random Face 4

FINISH MATT

SIZE **800**x **1600 MM**













SIZE 800x1600 MM

FINISH

MATT






IRON BLUE

FINISH MATT

SIZE **800**x **1600 MM**



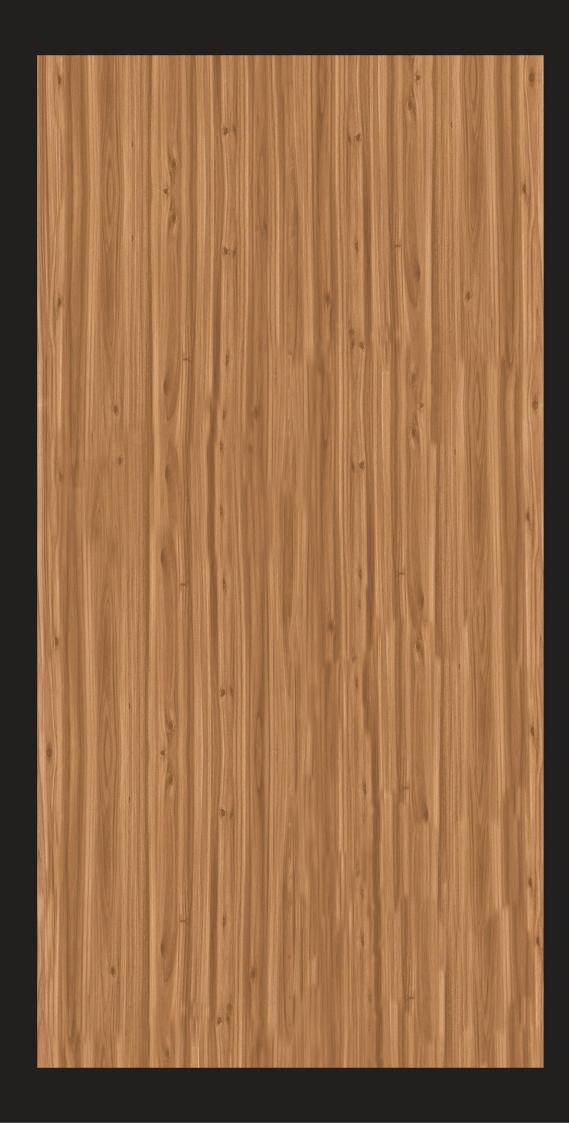

LEGNO CHERRY

FINISH MATT

SIZE **800**x **1600 MM**





LEGNO WENGE

FINISH MATT

SIZE **800**x **1600 MM**





MARAZZI CEMENTO

FINISH MATT

SIZE **800**x **1600 MM**





MARAZZI CHOCO

FINISH MATT

SIZE **800**x **1600 MM**





MARAZZI GRIGIO

FINISH MATT

SIZE **800**x **1600 MM**





MARAZZI ORO

FINISH MATT

SIZE **800**x **1600 MM**

> THICKNESS 9 mm





NATURAL WOOD LIGHT

Random Face 3

FINISH MATT

SIZE **800**x **1600 MM**











FINISH MATT

SIZE **800**x **1600 MM**













POPLAR CREMA

Random Face 3

FINISH MATT

SIZE **800**x **1600 MM**



Cleaning & Maintenance

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

TYPE OF STAIN	CHEMICAL PRODUCT	EXAMPLE
Grease	Alkaline - Solvent	Detergent
Oil	Solvent	Ammonia, Backing Soda
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic
Lime	Acid	Descaling Reagent, Hydro Chloric Acid
Cement	Acid	Hydro Chloric Acid
Wine	Alkaline	Ammonia, Liquid Bleach
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach
Rubber	Solvent	Alcohol, Thinner
Plaster	Acid	Hydro Chloric Acid
Candle Wax	Solvent	Alcohol, Thinner
Iodine	Oxidant	Liquid Bleach
Blood	Oxidant	Liquid Bleach
Ice Cream	Alkaline	Liquid Bleach

Note: It is recommended that any kind of stain needs to get clean immediately / as soon as possible.

Technical Specification

CHARACTERISTIC	STANDARD AS PER ISO13006:2018/ EN14411 Gr.Bla	MEAN VALUE	TEST METHOD
Regulatory Properties ————————————————————————————————————			
Deviation in Length and Width	± 0.30 % (±1.00mm)	± 0.10 %	ISO 10545-2
Deviation in Thickness	± 5.00 % (±0.50mm)	± 5.00 %	ISO 10545-2
Straightness in Side	± 0.30 % (±0.80mm)	± 0.10 %	ISO 10545-2
Rectangularity	± 0.30 % (±1.50mm)	± 0.10%	ISO 10545-2
Surface Flatness Central Curvature	± 0.40 % (±1.80mm)	± 0.50 %	ISO 10545-2
Surface Flatness Edge Curvature	± 0.40 % (±1.80mm)	± 0.50 %	ISO 10545-2
Surface Flatness Warpage	± 0.40 % (±1.80mm)	± 0.50 %	ISO 10545-2
Surface Quality	> 95% defects free	> 95% defects free	ISO 10545-2
Small Color Difference(for Plain Colour)	ΔE < 1.00	ΔE < 0.30	ISO 10545-16
Glossiness (Polished)	as per mfg.	Gloss Value> 90	Gloss Meter 60°
Glossiness (Matt)	as per mfg.	3 <gloss td="" value<7<=""><td>Gloss Meter 60°</td></gloss>	Gloss Meter 60°
Glossiness (Satin/Posh)	as per mfg.	7 <gloss td="" value<18<=""><td>Gloss Meter 60°</td></gloss>	Gloss Meter 60°
Structural Properties —	100330-040500-0-00000-0-0	SP 20003000000 New New York State V Systems	-100 to Antico 100 and Edition 700- EDITION EDITION TO 100-100
Water absorption	≤ 0.50 %	≤ 0.060 %	ISO 10545-3
Bulk density	as per mfg.	Min. 2.28 g/cc	ISO 10545-3
Massive Mechanical Properties ————	100000-0000 01000 -		- Francisco Proncessor Carravana
Modulus of rupture	Min. 35.0 N/mm ²	Min. 42.0 N/mm ²	ISO 10545-4
Breaking strength thickness <7.5	Min. 700.0 N	Min. 1000.0 N	ISO 10545-4
Breaking strength thickness ≥7.5	Min. 1300.0 N	Min. 1800.0 N	ISO 10545-4
Breaking strength thickness < 755nm)	Min. 1300.0 N	Min. 7500.0 N	ISO 10545-4
Surface Mechanical Properties —	(STACK-STATE) STACK-STACK-STACK STACK	ATROCOPOR DE TAMOS PARTICIPA DE LA CONTRACTOR DE LA CONTR	#00000 #0000 #000 W
MOH'S hardness #	as per mfg.	Glossy Min. 4*/ Posh Min. 6	BS EN 15771
Surface abrasion resistance #	as per mfg.	Glossy Min. 2/ Posh Min. 3	ISO 10545-7
Deep abrasion resistance #	Max. 175mm	Max. 132mm	ISO 10545-6
Thermal Hydrometric Properties —			
Moisture expansion	Max. 0.06%(0.6mm/m)	Max. 0.02mm/m	ISO 10545-10
Thermal expansion(COE) at 100°C	as per mfg.	Max. 6.0 x 106	ISO 10545-8
Thermal shock resistance	Min. 10 Cycle	Min. ¹0 Cycle	ISO 10545-9
Impact resistance(COR) #	Min. 0.55	Min. 0.55	ISO 10545-5
Frost resistance	as per mfg.	Frost Proof	ISO 10545-12
Chemical Properties —			
Resistance to staining glazed	Min. Class 3	Min. Class 4	ISO 10545-14
Resistance to household chemicals &	Min. Class GB	Min. Class GA	ISO 10545-13
swimming pool salts glazed			
Resistance to low concentrate acid and alkalis glazed	as per mfg.	Min. Class GLB**	ISO 10545-13
Resistance to high concentrate acid and alkalis glazed Safety Properties ————————————————————————————————————	as per mfg.	Min. Class GHB**	ISO 10545-13
y comments	as nor mfg	Glossy PO($<^{12}$) / Posh $\geq P^1(^{12}-^24)$	DC 7076 2
Skid resistance(DCOF-DRY) ##	as per mfg.		BS 7976-2
Slip resistance(DCOF)(R value) ##	as per mfg.	R9 to R ¹³	DIN 51130
Fire resistance	as per mfg.	Fire Proof	N.A.

Packing Details

	PRODUCT	SIZE	THICKNESS	TILES / BOX	COVERAGE AREA / BOX	WEIGHT (Kg)
_	Matt	800x1600mm	9mm	2pc	27.55 Sq ft	53 Kgs

^{*} With Nano polished
** Except Hydrofluoric Acid & it's compound
Tiles Intended for use on floor
As per customer requirement